


Towing hydraulic ram

Hydraulic ram is used to lift up to 12 m and spatial relocation of people with the set of necessary tools and materials for carrying out finishing and wiring works inside and outside the premises. Starting of the hydraulic ram is performed from AC supply line, with voltage 380 V.



MAIN TECHNICAL CHARACTERISTICS

1. Operating height of lift, m	12
2. Lifting capacity, kg	250
3. Carrying capacity, people	2
4. Rotation angle, grad.	360
5. Total dimension, in run-in position, m:	
- length	5,2
- width	2,0
- height	2,8
6. Mass, kg	1950
7. Max towing speed, km/h	25
8. Power consumption in working mode, kW / h	3,0

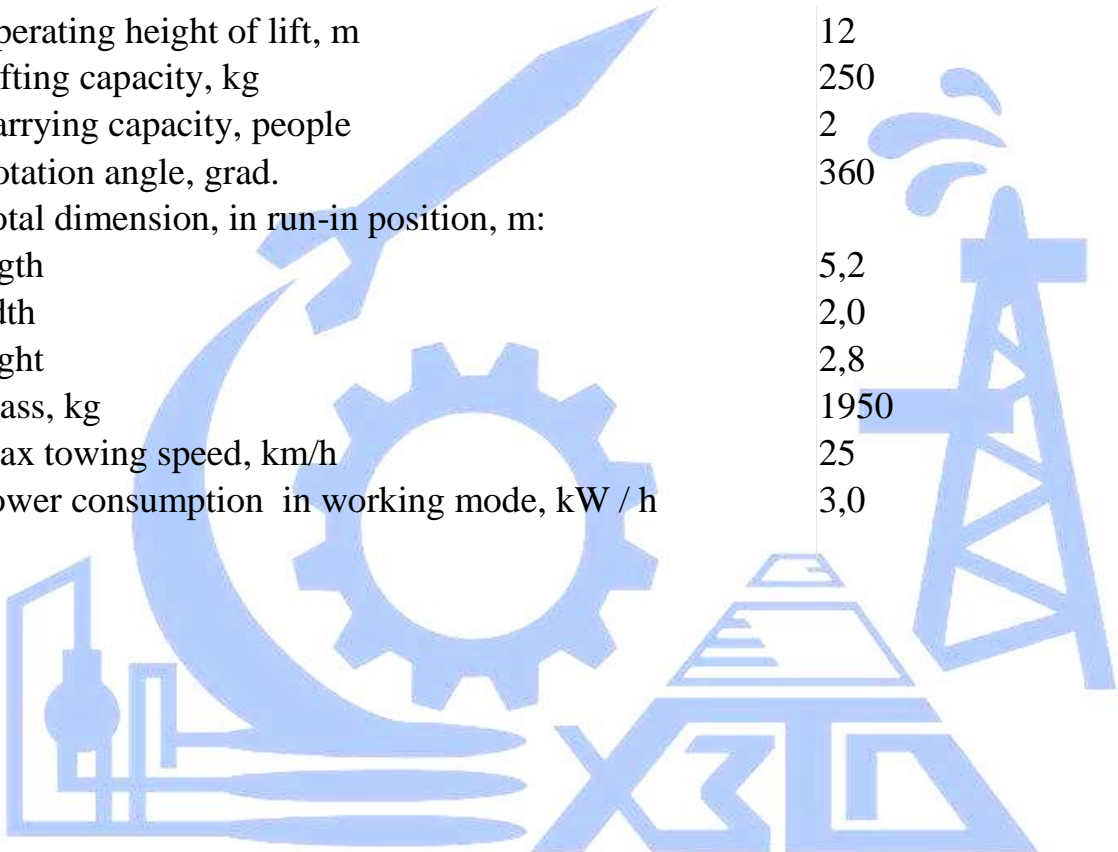

Kharkov transport equipment plant
3, Dostoevskogo Str., Kharkov, 61102, Ukraine,
tel/fax(0572) 52-41-17, : tel.:(0572) 51-40-72
e-mail: hzto@vandex.ru
www.hzto.com.ua